

Industrial

Laser Diode Modules with Adjustable Focus



Designed and constructed to withstand harsh conditions and satisfy rigorous industrial applications, this range of robust industrial laser modules offers a very high level of performance and has been specifically designed to meet the needs of industrial OEM applications. A hard-coated anodized case and a scratch-resistant sapphire window are provided with a range of options for electrical connection including an IP68 rated screw-on connector or a 2.5mm DC jack. This rugged design is combined with a user adjustable focus to allow integrators maximum flexibility while still ensuring a compact, robust and reliable product.

The adjustable focus industrial laser module is available in a variety of wavelengths from 375nm to 830nm and optical output powers from 0.97mW to 30mW depending on the choice of optics.

Line generators are available with either 45°, 60° or 90° full fan angle line and cross generating optics generate an accurate 70° full angle cross. The lens system produces a Gaussian intensity laser line which offers straight line precision without bowing. The beam is aligned to <0.25° of the mechanical axis of the laser.

The adjustable focus industrial range has been designed as a complete laser solution for heavy duty industrial alignment and positioning applications and also provides an ideal solution for UV curing, and analytical applications such as particle analysis and spectroscopy.

ProPhotonix has more than two decades of experience in providing lasers for the most demanding requirements and can provide custom solutions for specific applications. For further information on how ProPhotonix can meet your solution requirements, contact us.

Key Features

- Now Available in UV (375nm)
- Line, Elliptical Beam & Cross Generating Optics Available
- Robust, Reliable and Compact Design
- Scratch-Resistant Sapphire Window Protects Lens
- Available in Wavelengths from 375nm to 830nm
- Optical Output Powers from 0.97mW to 30mW
- User Adjustable Focus for Increased Flexibility
- Excellent Bore-Sighting <0.25°

Key Applications

- UV Curing
- Particle Analysis
- Analytical Applications
- Industrial Alignment
- Industrial Positioning
- Guidance Systems

Product Characteristics

Specifications	
Power Stability	<5%
Pointing Stability	<0.2mrad/°C
Bore Sighting	<0.25°
Operating Voltage	375nm: 7.5V DC Regulated +/-0.5V 635-830nm: 5.0V DC Regulated +/-0.5V
Case	Electrically Isolated
Circuit Protection	Static, Surge and Reverse Polarity
Connector Types	IP68M 12x 1mm Male Connector 2.5mm DC Male Connector
Operating Temperature	375nm: -10°C to +40°C 635-830nm: -10°C to +50°C
Storage Temperature	-40 °C to +80 °C
Housing Material	Aluminum - Hard Anodized Black
Exit Aperture Protection	Glass Sapphire Window
Certifications	All Products are RoHS Compliant
Warranty	1 Year

Line Generating Optics Characteristics

Wavelength (nm)	Optical Output Power (mW)	Max. Operating Current (mA)
375	4	90
	30	130
635	5	50
	10	105
	15	105
	30	130
650	5	70
	30	85
670	5	45
780	5	90
830	20	100

Elliptical Beam Characteristics

Wavelength (nm)	Optical Output Power (mW)	Max. Operating Current (mA)
635	0.97	45
	5	50
	8.2	50
	12.4	105
	27.5	135
650	0.97	45
	5	45
	27.5	85
670	0.97	45
	5	45
780	0.97	55
	5	55
830	27.5	100

Fan Angles for Line Generating Optics

Fan Angles (°)
45°
60°
90°


Cross Generating Optics Characteristics

Wavelength (nm)	Optical Output Power (mW)	Max. Operating Current (mA)
635	0.9	45
	4	50


Fan Angles for Cross Generating Optics

Fan Angles (°)
70°


Adjustable Focus Line DC Jack

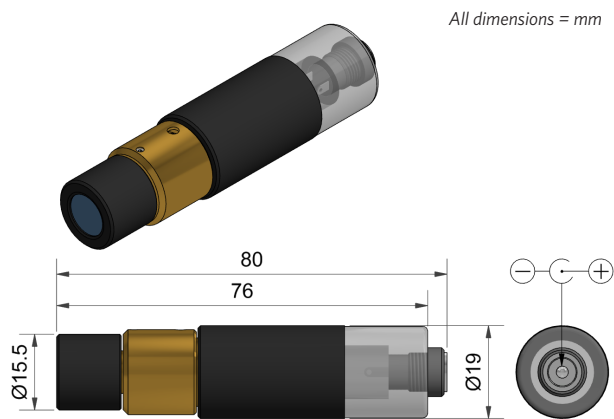


Adjustable Focus Spot DC Jack

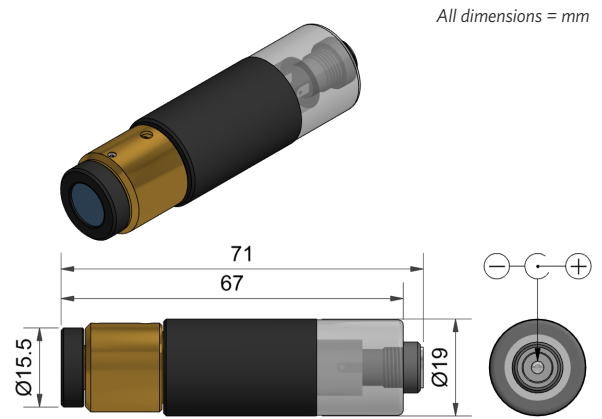

Adjustable Focus Line Screw Connector

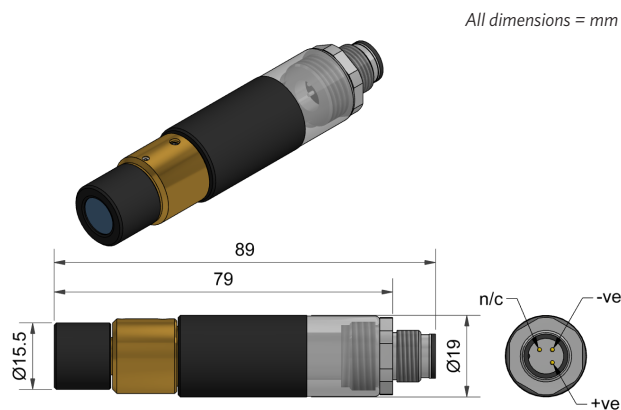

Adjustable Focus Spot Screw Connector

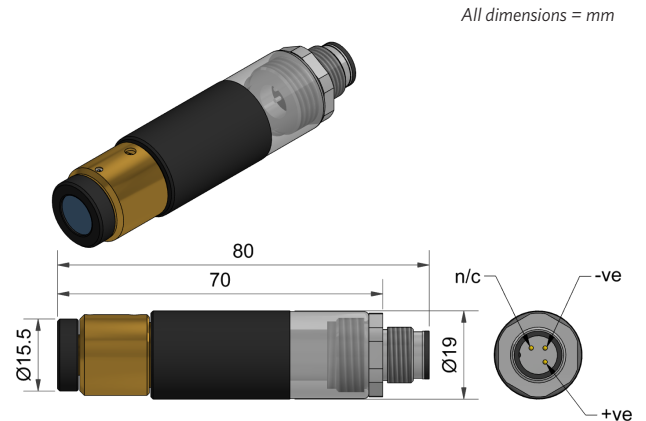

Custom Solutions


ProPhotonix specializes in the provision of custom solutions and can provide other wavelengths, diode powers and optics if required.

Part Numbers

To order your Industrial Laser Diode Module use the Product Code IND - Select Focus (V - Variable) - Select Wavelength (XXX) - Select Output Power (XXX) - Select Beam Shape (E - Elliptical/L - Line/C - Cross) - Select Fan Angle (XX) (Fan Angle for Line and Cross Optics ; XX Spot) - Select Connector (DC - Jack/SC - Screw on Connector).

e.g IND - V - 635 - 005 - L - 45 - DC

IND	—	V	—	XXX	—	XXX	—	E/L/C	—	XX	—	DC/SC
↑		↑		↑		↑		↑		↑		↑
Product code		Focus		Wavelength (nm)		Output Power		Beam Shape		Fan angle		Connector
↓		↓		↓		↓		↓		↓		↓
IND	—	V	—	635	—	005	—	L	—	45	—	DC

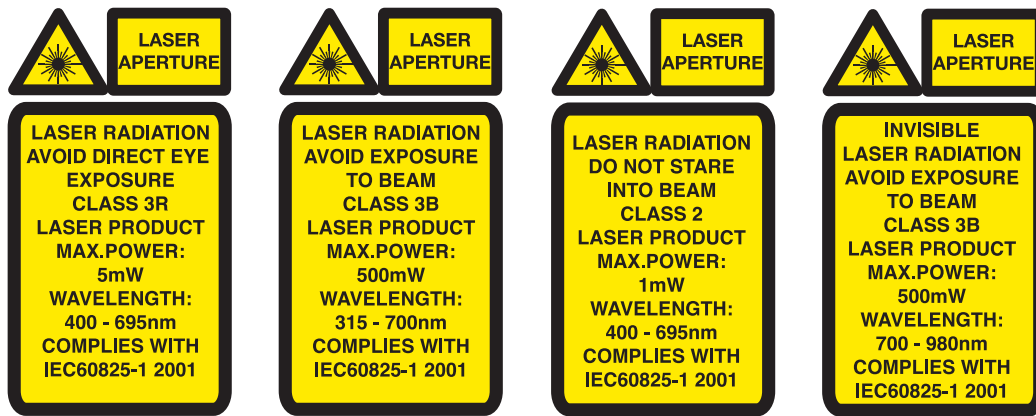

Laser Safety

The light emitted from these devices has been set in accordance with IEC60825. However, staring into the beam, whether directly or indirectly, must be avoided. IEC60825 classifies laser products into three different categories depending on light emitted, wavelength and eye safety.

CLASS II

"Caution", visible laser light less than 1.0mW. Considered eye safe, normal exposure to this type of beam will not cause permanent damage to the retina.

CLASS IIIR

"Danger", visible laser light between 1.0mW and 5.0mW. Considered eye safe with caution. Focusing of this light into the eye could cause some damage.

CLASS IIIB

"Danger", infrared (IR), and high power visible lasers considered dangerous to the retina if exposed.

NB: It is important to note that while complying with the above classifications, unless otherwise stated, our laser diode products are not certified and are designed solely for use in OEM products. The way in which the device is used in the final product may alter its original design classification, and it is the responsibility of the OEM to ensure compliance with the relevant standards.

NB. Without the inclusion of laser drive circuits, the output powers cannot be set in accordance with EN60825 since they are designed for OEM use and not certified devices as defined in the specification. The manufacturer of the complete laser product is responsible for complying with the requirements of EN60825. If the case temperature of the laser diode exceeds its maximum specification, premature or catastrophic failure may occur. To ensure the maximum life of the laser diode, it is recommended that an additional electrically insulated heatsink, of at least 35sq. cm. be used. Thermal transfer paste can be used to improve contact and heat dissipation. Do not restrict air circulation around the device. Specifications subject to change without notice.

Errors & Omissions Excepted. The information describes the type of product and shall not be considered as assured characteristics.

Document Revision:
(130524)

US Sales

Tel: +1 603-893-8778
 sales@prophotonix.com

EMEA & ROW Sales

Tel: +44-1279-717170
 sales@prophotonix.com

ProPhotonix and the ProPhotonix logo are trademarks of ProPhotonix, Inc. All other brand and product names are trademarks or registered trademarks of their respective holders. Copyright © 2024 ProPhotonix, Inc. All rights reserved.